


Perfect Sanding

UniSander

2.4.0. K + 2.4.0. K + 1.2.0.

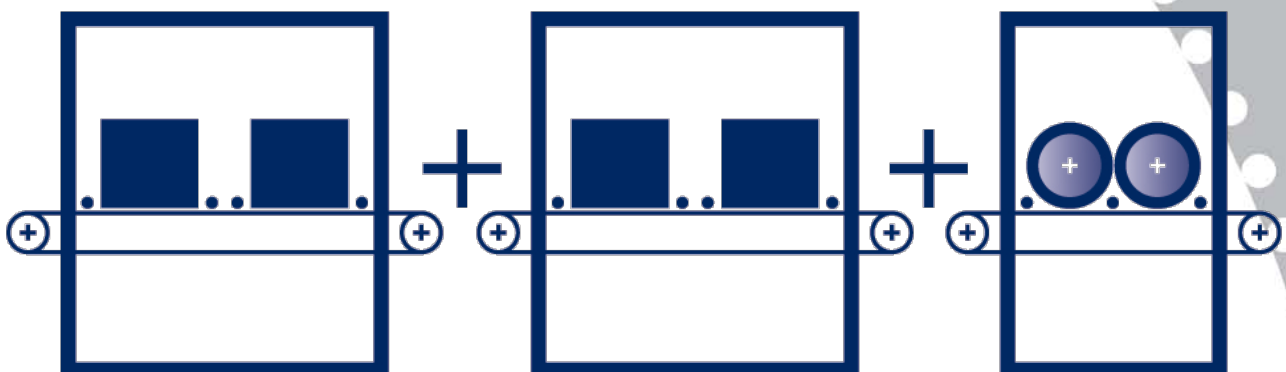

UniSanding

UniSander

2.4.0. K + 2.4.0. K + 1.2.0.

4 Sanding heads: 2 running with /
2 running against

4 Sanding heads: 2 running with /
2 running against

2 Sanding heads: 1 running with /
1 running against

Feed rate: 15 - 40 meter / min.

Speed sanding heads: 50 – 450 Rpm

Operation side: Right / Left

Voltage: 3 * 400 V, 50 Hz +N+PE

Safety: 64 A

Sucking out: 4000 m³/hour – 25 m/sec

Prepared for line installation.

Item size:

Length: min 100 mm

Height: min 5 mm - max 150 mm

Width: 1300 mm up to 2100 mm

The vacuum table can fix 100 x 100 mm

Dimension of the machine:

Length: 6055mm

Height: 2000 mm

Width: 2000 mm

Turbo Blower + Cleaning brushes

Roller table with pressure rollers

Vacuum table with pressure rollers

Vacuum table without pressure rollers

Super grip belt with pressure rollers

Color: RAL 7035

Use:

- Cross and longitudinal sanding.
- 100 % profile sanding.
- High line speed.

Finish sanding – All types of materials.

Lacquer sanding – All types of lacquer
/ primer

Perfect Sanding



UniSanding

Always the best solutions



UniSanding A/S • Gemsevej 11 • DK-7800 Skive
www.unisanding.com • info@unisanding.com
T: +45 96 14 28 00