
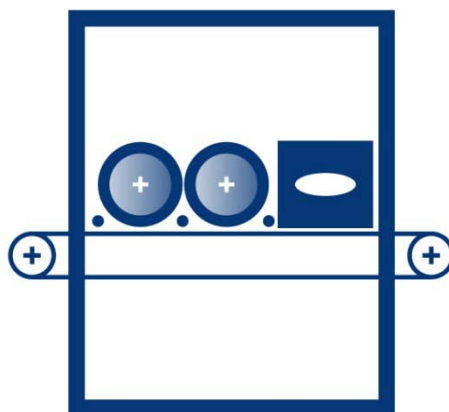


Perfect Sanding

UniSander Disk

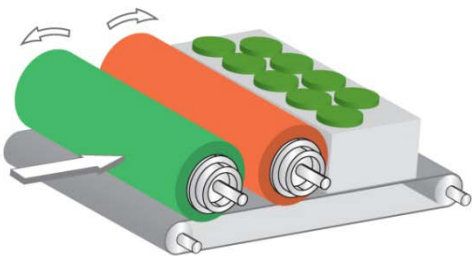

UniSanding

UniSander

2.2.0. DISK

2 Sanding Heads: 1 running with /
1 running against

Disk aggregate with 9 disk heads.

Feed rate: 3 – 12 meter / min.

Speed sanding heads: 50 – 450 Rpm

Operation side: Right / Left

Voltage: 3 * 400 V, 50 Hz +N+PE

Safety: 32 A

Sucking out: 3000 m³/hour – 25 m/sec

Prepared for line installation.

Item size:

Length: min 100 mm

Height: min 5 mm - max 150 mm

Width: 1300 mm up to 2100 mm

The vacuum table can fix 100 x 100 mm

Dimension of the machine:

Length: 2185 mm

Height: 2000 mm

Width: 2000 mm

Turbo Blower + Cleaning brushes

Roller table with pressure rollers

Vacuum table with pressure rollers

Vacuum table without pressure rollers

Super grip belt with pressure rollers

Color: RAL 7035

Use:

- Aggressive surface sanding.
- Finish sanding - High gloss lacquer.
- Finish sanding - Folia / High gloss folia.

Finish wood sanding – All types of materials.

Lacquer sanding – All types off lacquer / primer

Perfect Sanding



UniSanding

Always the best solutions



UniSanding A/S • Gemsevej 11 • DK-7800 Skive
www.unisanding.com • info@unisanding.com
T: +45 96 14 28 00