

Perfect Sanding

Modell UniSander 2.2.0. Disc




www.unisanding.com

UniSanding

UniSander

2.2.0. Disc

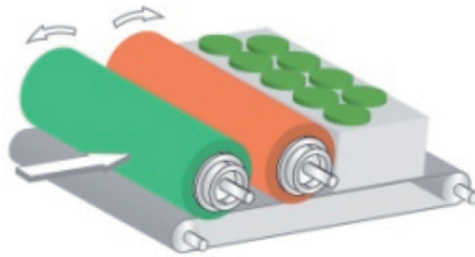

2 sanding heads: 1 up-grind / 1 down-grind

Disc unit with 9 disc heads.

Forward speed: 3-12 meters / min

Speed sanding heads: 50-450 rpm

Operating side: right / left

Volt: 3 * 400 V, 50 Hz + N + PE

Fuse: 32 A

Air extraction: 3000 m³ / hour – 25 m/sec

Ready for line installation.

Item size:

Length: min. 100 mm

Height: min. 5 mm – max. 150 mm

Width: 1300 mm up to 2100 mm

Vacuum table can hold 100 x 100 mm items

Unit dimensions:

Length: 2185 mm

Height: 2000 mm

Width: 2000 mm

Turbo fan + cleaning brushes

Trolley with pressure rollers

Vacuum table with pressure rollers

Vacuum table without pressure rollers

Super grip band with pressure rollers

Colour: RAL 7035

Use:

- Aggressive surface sanding.
- Finish sanding – Full gloss varnish.
- Finish sanding – Sheeting / full gloss sheeting.

Wood finish sanding – All types of materials.

Varnish sanding – All types of varnish/paint.

